

TRD

DOUBLE SCISSOR ALIGNMENT LIFT

TRD DOUBLE SCISSOR LIFT IS IDEAL FOR EASILY AND CONVENIENTLY SECINDLY LIFTING ALL WHEELS OFF THE RUNWAY FOR BRAKE, TIRE, SUSPENSION AND TWO OR FOUR WHEEL ALIGNMENT WORK.



TA0004-XD TA0055-XD

DOUBLE SCISSOR LIFT


SPECIFICATIONS

PRODUCTS

MODEL		TA0004-XD	TA0055-XD
Lifting capacity		4000kg	5500kg
Scissors Lifting Capacity		4000kg	4000kg
Lifting time		55 S	55 S
Max. Lifting Height	A	1870mm	1870mm
Min. Height		300mm	320mm
Runway Length	B	4800mm	4991mm
Overall Width	C	2190mm	2190mm
Width Between Runway	D	940mm	940mm
Overall Length (Inc. Ramps)	E	6336mm	6527mm
Min. Four Wheel Align	F	2180mm	2180mm
Max. Four Wheel Align	G	4040mm	4230mm
Max. Two Wheel Align	H	4200mm	4390mm
Motor		4.0HP	4.0HP
Gross Weight		2436kg	2588kg

FEATURES

PRODUCTS

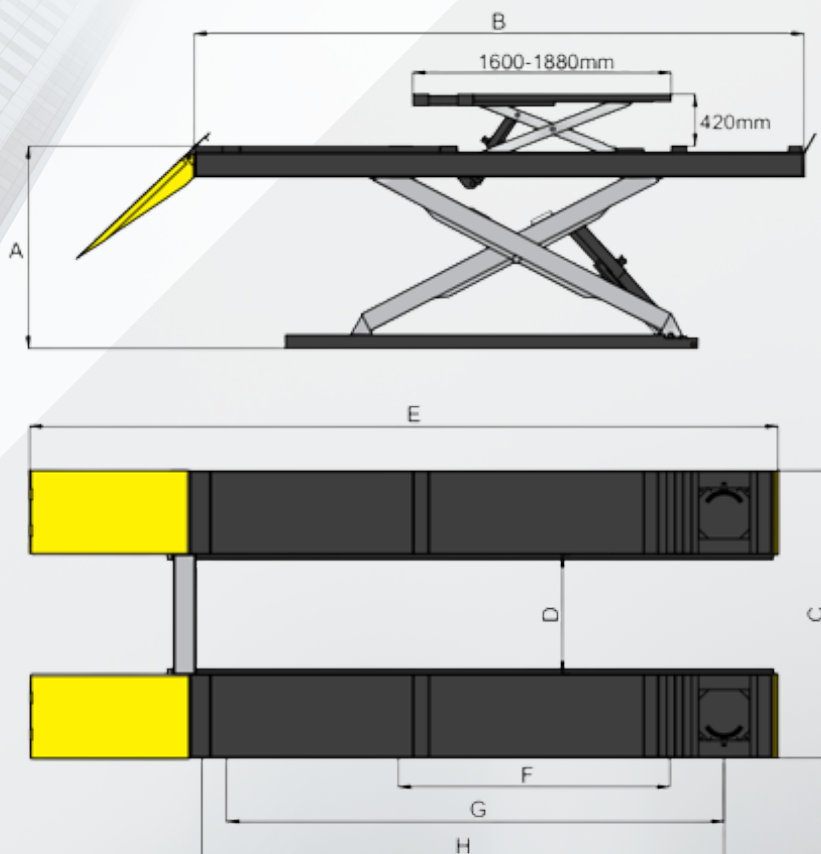


DOUBLE SCISSOR LIFT




Optional airline kits. Easy to install with all models of rolling jacks with pneumatic pump.
Kits No.:T400XP



Oil-water separator and solenoid air valve are installed on the control cabinet.

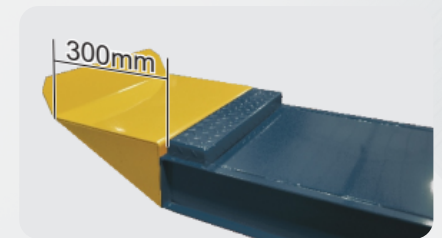

Optional extension kits to extend platform with extra 300mm.
Kits No.:T200XP

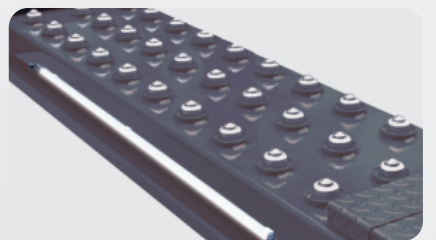

Rear-slip ball sets. Optional 24V LED light. LED Kits No.:T010XP



DOUBLE SCISSOR LIFT


DOUBLE SCISSOR ALIGNMENT LIFT

THE DOUBLE SCISSOR LIFT IS MADE STRONGER, MORE VERSATILE, AND EASIER TO USE.

FEATURES

PRODUCTS


- Synchronization cylinders system equipped with hose burst valves.
- 24V control system with photocells device.
- The safety stop device at the height of 300mm, both control buttons are needed to lower down the lift from 300mm to ground with tone alarm for safety.
- Skid proof diamond runways and adjustable turnplate blocks. Self-lubricating UHMW polyethylene sliders and bronze bush..

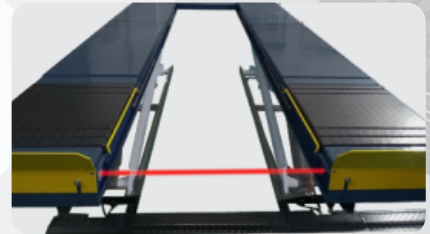

Photocell configuration for the leveling of the two platforms, more stable and safe.



Secondary scissor lift controlled with ease by remote control

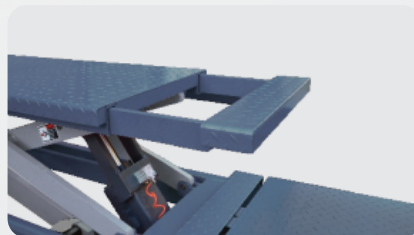

Extendable varying platform suitable for varying wheelbases.

