

# TRD

## HYDRAULIC SCISSOR **COMMERCIAL LIFT**

*GREAT PERFORMANCE AND THE PERFECT CHOICE FOR YOUR COMMERCIAL SERVICE.*




**T004X TA004X T055X  
TA055X T037X TA037X**

# SCISSOR LIFT

## SPECIFICATIONS PRODUCTS

MODEL	T004X	TA004X	T055X	TA055X	T037X	TA037X
Style	Non-Alignment	Alignment	Non-Alignment	Alignment	Non-Alignment	Alignment
Lifting capacity	4000kg	4000kg	5500kg	5500kg	7300kg	7300kg
Lifting time	55 S	55 S	75 S	75 S	110 S	110 S
Max. Lifting Height	A 1870mm	1870mm	1870mm	1870mm	1870mm	1870mm
Min. Height						
Runway Length	B 4828mm	4828mm	5018mm	5018mm	5428mm	5428mm
Overall Width	C 2190mm	2190mm	2290mm	2290mm	2390mm	2390mm
Width Between Runway	D 940mm	940mm	1040mm	1040mm	1140mm	1140mm
Overall Length (Inc. Ramps)	E 6594mm	6364mm	6784mm	6554mm	7194mm	6964mm
Min. Four Wheel Align	F /	2080mm	/	2080mm	/	2490mm
Max. Four Wheel Align	G /	4070mm	/	4260mm	/	4680mm
Max. Two Wheel Align	H /	4230mm	/	4420mm	/	4840mm
Motor	3.0HP	3.0HP	4.0HP	4.0HP	4.0HP	4.0HP
Gross Weight	1835kg	2175kg	2337kg	2624kg	2494kg	2878kg

## FEATURES PRODUCTS

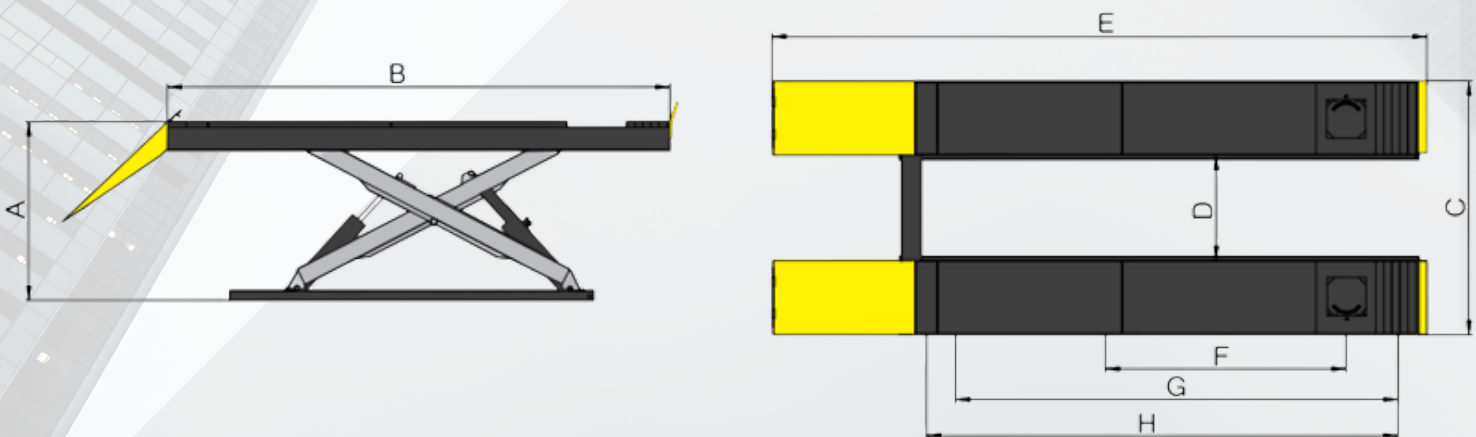


# SCISSOR LIFT




**Optional Rolling Jack  
with 1.5" and 2.5" extension  
adapters  
included.**



**Optional airline kits. Easy and convenient installation for all models of rolling jacks with a pneumatic pump.  
Kits No.:T400XP**



**Optional extension kits to extend platform with extra 300mm.  
Kits No.:T100XP(T004X/T055X)  
Kits No.:T200XP(TA004X/TA055X)  
Kits No.: T300XP(TA037X)**

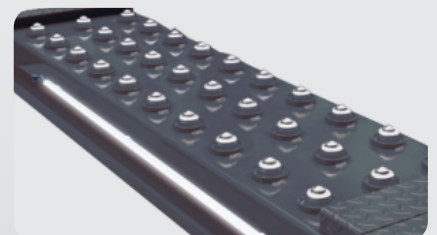

**Rear-slip ball sets.  
Optional LED lights provide extra and efficient lighting for underneath the vehicle. LED Kits No.:T010XP**

## HYDRAULIC SCISSOR COMMERCIAL LIFT

*TRD SCISSORS LIFTS, THE SAME AS TRD OTHER LIFTS, ADHERE TO THE PRINCIPLE OF SAFETY, DURABILITY, CONVENIENCE AND BEST PERFORMANCE.*


### FEATURES

#### PRODUCTS

- Single dual synchronous cylinders for X400 and X400A,
- Double dual synchronous cylinders for model X550, X550A, and X730 X730A. Electro-air control system, which operates the self-locking safety mechanism. Heavy-duty design, the X serial scissor lifts use large steel tube to make it strong and assures the runways remain level during working.
- Skid proof diamond platform to avoid skidding. Optional rolling jacks:
- J6H: 2800kg lifting capacity with manual control.
- J6A: 2800kg lifting capacity with pneumatic pump. RJ-8A: 3500kg lifting capacity with pneumatic pump



Service shelf for more effective working environments

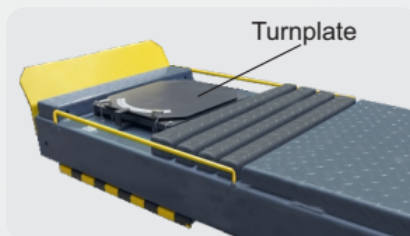

Adjustable turnplate blocks to fit various wheel bases vehicles



Photocell configuration for the leveling of the two platforms for T004X and TA004X